

## Signal Conditioning Amplifier System

### FEATURES

- Strain gage, transducer, and thermocouple inputs
- Frequency response to 110 kHz
- Analog output of  $\pm 10$  VDC
- Operation with 12 to 15 VDC and 120/240 VAC power
- Scalable from 8 to 128 channels in high-density enclosures
- Digital control from both front panel and PC over Ethernet
- Remote channel-by-channel monitoring of signals by Ethernet



### DESCRIPTION

The A2 is an analog signal conditioner and amplifier system for strain gages, strain-gage-based transducers, thermocouples and various other sensors with high-level signals. Scalable in multiples of eight channels to a maximum of 128 for each system, the A2 features digital control of the system instrumentation and monitoring of the analog outputs, both locally on the control panel and remotely by Ethernet from a PC. The Model A2 is an embedded web server. All system, card, and channel settings are accessible using simple HTTP (hypertext transfer protocol) commands or by using the graphical user interface provided by the system. Ordinary web browsers, such as Internet Explorer, can be used to control the system. The A2 is specially designed to function as the front-end for DAQ's and recorders accepting high-level analog signals.

Instrumentation hardware, available as individual eight-channel cards for strain gage, thermocouples, and high-level signals, features high stability with temperature and time. Strain-gage instrumentation accepts full-, half-, and quarter-bridge circuits and has built-in bridge completion resistors for 120-, 350- and 1000-ohm quarter bridges. Amplifiers gain, bridge excitation and balance, shunt calibration, and signal filtering are digitally controlled. Instrument design enables sensors to remain connected when cards are removed from the system for bridge configuration.

### SPECIFICATIONS

#### General

All specifications are nominal or typical at  $+23^{\circ}\text{C}$  unless noted. Performance may be degraded in the presence of high-level electromagnetic fields.

#### System Configuration

Each system consists of a Model A2-MC-8 Controller and at least one 8-channel instrumentation card. Stackable expansion cabinets are added when two or more instrumentation cards are used.

### Physical Dimensions

#### Eight Channel Enclosure with Controller

17" W x 12" D x 8.5" H  
[43.2 cm W x 30.5 cm D x 21.6 cm H]

#### 40 Channel Enclosure with Controller

17" W x 12" D x 17.5" H  
[43.2 cm W x 30.5 cm D x 44.6 cm H]

#### 72 Channel Enclosure with Controller

17" W x 12" D x 26.5" H  
[43.2 cm W x 30.5 cm D x 67.3 cm H]

#### 104 Channel Enclosure with Controller

17" W x 12" D x 35.5" H  
[43.2 cm W x 30.5 cm D x 90.2 cm H]

#### 128 Channel Enclosure with Controller

17" W x 12" D x 44.5" H  
[43.2 cm W x 30.5 cm D x 113.0 cm H]

### Input Power

115 or 230 VAC with optional external "line lump" power supply (15 VDC output). Will also work from a 12V battery with reduced specifications.



Controller with Model A2-EC Expansion Cabinet

Signal Conditioning Amplifier System



**MODEL A2-MC-8 CONTROLLER**

Supports hardware identification, setup and output data monitoring of each type of plug-in card via a local keyboard interface or remotely via an Ethernet Interface. Each controller supports 8 channels of signal conditioning and up to 128 channels of signal conditioning when expansion cabinets are added.

**Front Panel User Interface**

Membrane keypad with illuminated 128 x 64 pixel FSTN positive, gray transfective LCD

**Communication Interface**

Physical: 10/100 Base-T  
Protocol: HTTP  
IP Addressing: Static. Configurable by the front panel controls

**Size**


17" W X 12" D X 8.5"H  
[43.2 cm W x 30.5 cm D x 21.6 cm H]

**Weight**

12.6 lbs [5.7 kg]

**MODEL A2-SG-8-BX STRAIN GAGE CARD**

(Specify **Model A2-SG-8-BW** (with Butterworth filter characteristics) or **Model A2-SG-8-BS** (with Bessel filter characteristics).)

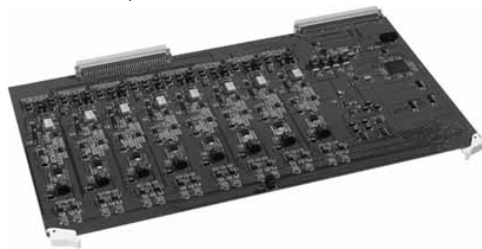

These specifications apply for each of eight independent channels of signal conditioning per removable card.

**Amp Input**

**Inputs**

Quarter (120 ohms, 350 ohms, and 1000 ohms), half and full bridge (50-1000 ohms)  
Bridge completion resistors are provided for quarterbridge circuits

**Input Impedance**

>100 MΩ

**Source Current**

±5 nA typical; ±10 nA max.

**Amplifier**

**Zero Temperature Stability**

±1.7 μV/°C RTI\*, ±100 μV/°C RTO\*\*, after 30-minute warm-up

**Input Range**

4 to 80 mV full-scale input range (x2500 to x125)—adjustable by software control per channel

**Output Range**

±10V into 600Ω minimum load (When powered from 15 VDC)

**DC Gain Accuracy and Stability**

±0.10%; ±50 ppm/°C

**Common-Mode Rejection (DC to 100 Hz)**

105 dB typical

**Common-Mode Voltage**

±10V typical

**Bandpass**

Full Power Frequency response DC to 110 kHz; -3 dB. (Wideband operation)  
Slew Rate: 7 V/μs

**Dynamic Characteristics**

**Noise RTI**

1 μV p-p at 0.1 Hz to 10 Hz  
6 μVRMS at 0.1 Hz to 110 kHz

**Total Harmonic Distortion**

0.014% at 1 kHz

**Filter**

**Type**

Software-settable 5th order filter—DC to 40 kHz max: -3 dB. (Butterworth or Bessel characteristics)

**Settings**

Wideband, 40 kHz, 20 kHz, 10 kHz, 5 kHz, 1 kHz, 100 Hz, and 10 Hz  
Software-programmable per channel.

**Bridge Excitation**

**Type**

Constant voltage

**Settings**

0.0, 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 7.0, 7.5, 8.0, 8.5, 9.0, 9.5 and 10.0 VDC  
Software-programmable per channel

**Accuracy**

±3 mV typical

**Current**

50 mA max. Over-current protected

**Load Regulation**

<0.05% of full scale for a load variation of 10% to 100% of full load

**Temperature Stability**

Better than ±0.005%/°C

\*Referred to input

\*\*Referred to output

## Signal Conditioning Amplifier System

**Bridge Balance**

99% of measurement range

**Calibration**

Standard factory-installed resistors ( $\pm 0.1\%$ ) simulate 5000 microstrain at  $GF=2$  for 120-, 350-, and 1000-ohm quarter bridge

**8 Channel Strain Gage Card Size**

15.13" W x 9" D [38.4 cm W x 22.9 cm D]

**8 Channel Strain Gage Card Weight**

0.80 lbs [0.36 kg]

**MODEL A2-TC-8-BX THERMOCOUPLE CARD**

(Specify **Model A2-TC-8-BW** (with Butterworth filter characteristics) or **Model A2-TC-8-BS** (with Bessel filter characteristics)).

These specifications apply for each of eight independent channels of signal conditioning per removable card.

**Amp Input****Inputs**

Thermocouple types J, K, T, E, N, R, S, B.  
Built-in electronic cold-junction compensation  
Software-selectable

**Input Impedance**10 M $\Omega$  differential, 100 K $\Omega$  common mode**Source Current** $\pm 5$  nA typical;  $\pm 10$  nA max.**Amplifier****Zero Temperature Stability** $\pm 1.7$   $\mu\text{V}/^\circ\text{C}$  RTI\*,  $\pm 100$   $\mu\text{V}/^\circ\text{C}$  RTO\*\*, after 30-minute warm-up**Input Range**

4 to 80 mV full-scale input range (X2500 to X125)—adjustable by software control per channel

**Output Range** $\pm 10\text{V}$  into 600 $\Omega$  minimum load (when powered from 15 VDC)**DC Gain Accuracy and Stability** $\pm 0.05\%$ ;  $\pm 50$  ppm/ $^\circ\text{C}$ **Common-Mode Rejection (dc to 100 Hz)**

105 dB typical

**Common-Mode Voltage** $\pm 10\text{V}$  typical**Bandpass**

Full Power Frequency response DC to 110 kHz; -3 dB  
(Filter not selected)  
Slew Rate: 7 V/ $\mu\text{s}$

**Dynamic Characteristics****Noise RTI**

1  $\mu\text{Volt}$  p-p at 0.1 Hz to 10 Hz  
6  $\mu\text{VRMS}$  at 0.1 Hz to 110 kHz

**Total Harmonic Distortion**

0.014% at 1 kHz

**Filter****Type**

Software-settable 5th order filter—  
DC to 40 kHz: -3 dB (Butterworth or Bessel characteristics)

**Settings**

Wideband, 40 kHz, 20 kHz, 10 kHz, 5 kHz, 1 kHz,  
100 Hz, and 10 Hz  
Software-programmable per channel

**8 Channel Thermocouple Card Size**

15.13" W x 9" D [38.4 cm W x 22.9 cm D]

**8 Channel Thermocouple Card Weight**

0.80 lbs [0.36 kg]

**MODEL A2-HL-8-BX HIGH LEVEL CARD**

(Specify **Model A2-HL-8-BW** (with Butterworth filter characteristics) or **Model A2-HL-8-BS** (with Bessel filter characteristics)).

These specifications apply for each of eight independent channels of signal conditioning per removable card.

**Amp Input****Inputs**

DC voltage (differential)

**Input Impedance**>100 M $\Omega$ **Source Current** $\pm 5$  nA typical;  $\pm 10$  nA max.**Amplifier****Zero Temperature Stability** $\pm 1.7$   $\mu\text{V}/^\circ\text{C}$  RTI\*,  $\pm 100$   $\mu\text{V}/^\circ\text{C}$  RTO\*\*, after 30-minute warm up**Input Range**

1 to 10V full-scale input range—adjustable by software control per channel

**Output Range** $\pm 10\text{V}$  into 600 $\Omega$  minimum load (when powered from 15 VDC)**DC Gain Accuracy and Stability** $\pm 0.10\%$ ;  $\pm 50$  ppm/ $^\circ\text{C}$ **Common-Mode Rejection (dc to 100 Hz)**

105 dB typical

**Common-Mode Voltage** $\pm 10\text{V}$  typical**Bandpass**

Full Power Frequency response DC to 110 kHz;  
-3 dB. (Filter not selected)  
Slew Rate: 7 V/ $\mu\text{s}$

**Dynamic Characteristics****Total Harmonic Distortion**

0.014% at 1 kHz

\*Referred to input

\*\*Referred to output

## Signal Conditioning Amplifier System

### Filter

#### Type

Software-settable 5th Order filter—DC to 40 kHz max:  
-3 dB. (Butterworth or Bessel characteristics)

#### Settings

Wideband, 40 kHz, 20 kHz, 10 kHz, 5 kHz, 1 kHz,  
100 Hz, and 10 Hz  
Software-programmable per channel

### Bridge Excitation

#### Type

Constant voltage

#### Settings

0.0, 0.5, 1.0, 1.5, 2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5,  
6.0, 6.5, 7.0, 7.5, 8.0, 8.5, 9.0, 9.5 and 10.0 VDC  
Software-programmable per channel

#### Accuracy

±3 mV typical

#### Current

50 mA max. Over-current protected

#### Load Regulation

<0.05% of full scale for a load variation of 10% to  
100% of full load

#### Temperature Stability

Better than ±0.005%/°C

### 8 Channel High Level Card Size

15.13" W x 9" D [38.4 cm W x 22.9 cm D]

### 8 Channel High Level Card Weight

0.80 lbs [0.36 kg]

## MODEL A2-EC-X EXPANSION CABINET

(Specify **Model A2-EC-8** (supports one additional instrumentation card) or **Model A2-EC-16** (supports two additional instrumentation cards) or **Model A2-EC-32** (supports four additional instrumentation cards).

Stackable expansion cabinets are added when two or more instrumentation cards are used. Up to 16 instrumentation cards (128 channels) can be used with one Model A2-MC Master Controller. Control and power are routed via the Model A2-MC-8 Controller.



Front View

Back View

Controller with Model AZ-EC Expansion Cabinet

### Expansion Cabinets Size

Model A2-EC-8 Expansion Cabinet:  
17" W X 12" D X 3.0" H  
[43.2 cm W x 30.5 cm D x 7.6 cm H]

Model A2-EC-16 Expansion Cabinet:  
17" W X 12" D X 5.0" H  
[43.2 cm W x 30.5 cm D x 12.7 cm H]

Model A2-EC-32 Expansion Cabinet:  
17" W X 12" D X 9.5" H  
[43.2 cm W x 30.5 cm D x 24.1 cm H]

### Expansion Cabinets Weight

Model A2-EC-8 Expansion Cabinet: 4.5 lbs [2.04 kg]  
Model A2-EC-16 Expansion Cabinet: 6.8 lbs [3.08 kg]  
Model A2-EC-32 Expansion Cabinet: 12.0 lbs [5.44 kg]

## MODEL A2 CONTROL AND MONITORING SOFTWARE

**Recommended Browser (User Supplied):** Internet Explorer version 6 or later, running under a Windows operating system (XP, Vista, and 7). A PC with Intel Pentium class, or better, processor (450 MHz or higher), 64 MB RAM and a 100 Base-T Ethernet interface is recommended.

## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.