

# String Encoder

Mates to Virtually Any Encoder  
 Ranges: 0-75 to 0-550 inches  
 Easy Encoder Attachment

# PT9600

## Specification Summary:

### GENERAL

Full Stroke Range Options—on this datasheet ..... 0-75 to 0-550 inches  
 Motion Conversion Ratio.....12.6 inches per turn, *see ordering information*  
 Accuracy  
 Typical ... the lesser of 0.02% f.s. or 0.04% of measurement  $\pm 1/2$  pulse max.  
 Best .....not less than 0.001 in. (0.03 mm)  
 Repeatability .....  $\pm 0.02\%$  of measurement  $\pm 1/2$  pulse max.  
 Measuring Cable Options ..... nylon-coated stainless steel or thermoplastic  
 Enclosure Material ..... powder-painted aluminum  
 Encoder Shaft Coupling ..... aluminum flexible coupling  
 Maximum Allowable Rotational Sensor Torque ..... 1.0 in.-lbs.  
 Maximum Retraction Acceleration ..... *see ordering information*  
 Maximum Velocity ..... *see ordering information*  
 Weight, Aluminum Enclosure ..... 8 lbs. max.

### ENVIRONMENTAL


Operating Temperature ..... -40° to 200°F (-40° to 90°C)



Our unique string encoder module mates to virtually any encoder, giving you a cost-effective long-range linear position measurement solution that precisely fits your requirements.

This modular approach delivers the ultimate in flexibility. To order, simply select the measurement range, the cable tension and encoder mounting style—it's that easy! We even supply all the necessary encoder mounting tools and attaching hardware. If you can't find your encoder mounting style or you want us to provide the encoder, please give us a call.

Fig. 1 – Outline Drawing (26 oz. cable tension only)

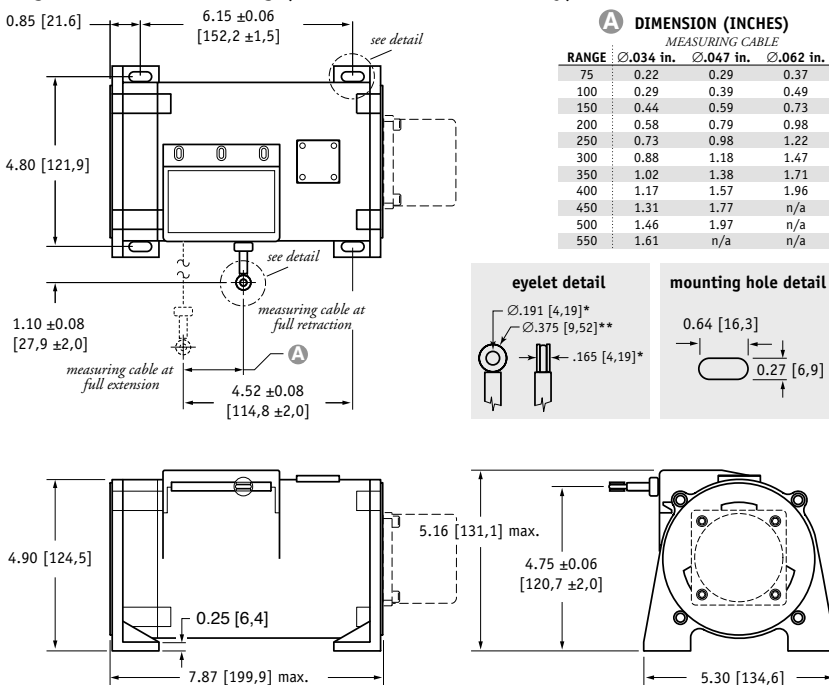

DIMENSIONS ARE IN INCHES (MM)  
 tolerances are 0.03 IN. (0.5 MM) unless otherwise noted.

\* tolerance = +.005 -.001 [+.13 -.03]  
 \*\* tolerance = +.005 -.005 [+.13 -.13]



# INTERTECHNOLOGY

1 Scarsdale Road, Don Mills, ON M3B 2R2  
 Tel: 416-445-5500 Fax: 416-445-1170 TOLL FREE: 1-800-465-1600  
 E-Mail: sales@intertechnology.com Website: www.intertechnology.com

**Ordering Information:**

**Model Number:**

**PT9600-** \_\_\_\_\_ **R** \_\_\_\_\_ **A** \_\_\_\_\_ **B** \_\_\_\_\_ **C** \_\_\_\_\_ **D**

order code:

Sample Model Number:

**PT9600 - 0200 - 111 - F01**

- R** range: 200 inches
- A** cable tension: 26 oz.
- B** measuring cable: .034 nylon-coated stainless
- C** cable exit: front
- D** rotational sensor mounting style: F01 (2.5-in. sq. flange)

» Trying to reorder but can't find your existing model number? Please contact factory for help.


**Full Stroke Range:**

<b>R</b> order code:	<b>0075</b>	<b>0100</b>	<b>0150</b>	<b>0200</b>	<b>0250</b>	<b>0300</b>	<b>0350</b>	<b>0400</b>	<b>0450*</b>	<b>0500*</b>	<b>0550*</b>
full stroke range, min:	75 in.	100 in.	150 in.	200 in.	250 in.	300 in.	350 in.	400 in.	450 in.	500 in.	550 in.


\* - 52 oz. cable tension strongly recommended

**Measuring Cable Tension:**

<b>B</b> order code:	<b>1</b>	<b>2</b>
tension (30%):	26 oz.	52 oz.
max. acceleration:	1 G	5 G
max. velocity:	60 inches/sec	200 inches/sec



standard housing  
see fig 1.



dual-spring housing  
see fig 2.

**Measuring Cable / Conversion Ratio:**

<b>B</b> order code:	<b>1</b>	<b>2</b>	<b>3</b>
measuring cable:	.034 nylon-coated stainless steel	.047 stainless steel	.062 thermoplastic
conversion ratio:	1 turn = 12.673 ± 0.010 in. <i>available in all ranges</i>	1 turn = 12.714 ± 0.010 in. <i>all ranges up to 500 inches</i>	1 turn = 12.755 ± 0.010 in. <i>all ranges up to 400 inches</i>

**Cable Exit:**

<b>C</b> order code:	<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>
	front	top	back	down


**Ordering Information:**

**Rotational Sensor Mounting Style:**

① order code:	F01	F02	S01	S02	S04
	2.5-in. Flange Mount 3/8-inch shaft	2-in. Flange Mount 3/8-inch shaft	Face-Mount 6 mm shaft M4 mounting screws	Face-Mount 10 mm shaft M4 mounting screws	Face-Mount 10 mm shaft M3 mounting screws


*Note: If you don't see your encoder style, please contact factory. All encoder types supported.*

**F01 - 2½-inch Sq. Flange Mount (3/8-inch shaft)**

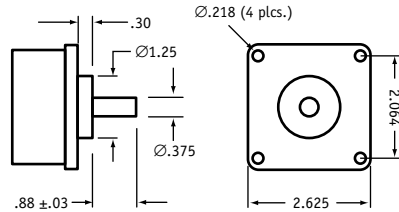


*all dimensions are in inches*

**F02 - 2-inch Sq. Flange Mount (3/8-inch shaft)**

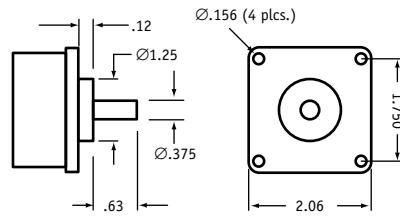


*all dimensions are in inches*

**S01 - Face-Mount (6mm shaft/M4 screws)**

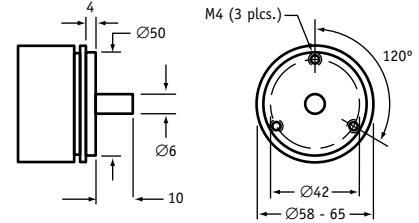


*all dimensions are in mm*

**S02 - Face-Mount (10mm shaft/M4 screws)**

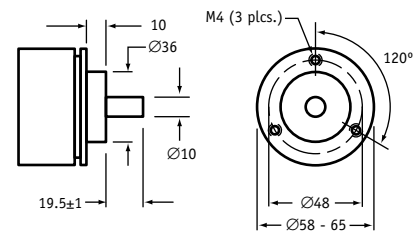


*all dimensions are in mm*

**S04 - Face-Mount (10mm shaft/M3 screws)**

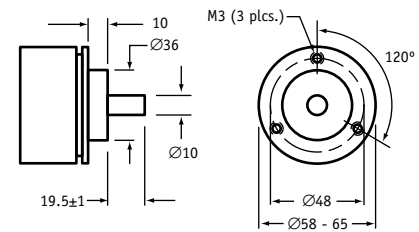

*all dimensions are in mm*





Fig. 2 – Outline Drawing (42 oz. cable tension only)

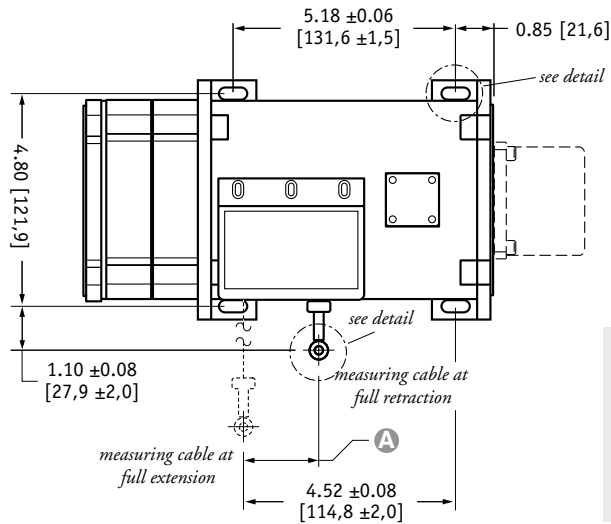

**A DIMENSION (INCHES)**

MEASURING CABLE

RANGE	∅.034 in.	∅.047 in.	∅.062 in.
75	0.22	0.29	0.37
100	0.29	0.39	0.49
150	0.44	0.59	0.73
200	0.58	0.79	0.98
250	0.73	0.98	1.22
300	0.88	1.18	1.47
350	1.02	1.38	1.71
400	1.17	1.57	1.96
450	1.31	1.77	n/a
500	1.46	1.97	n/a
550	1.61	n/a	n/a

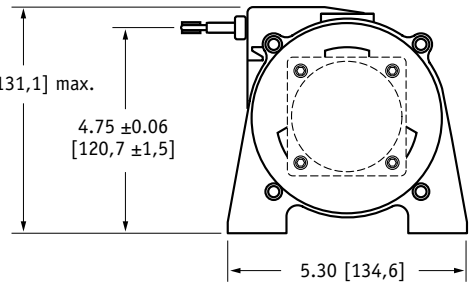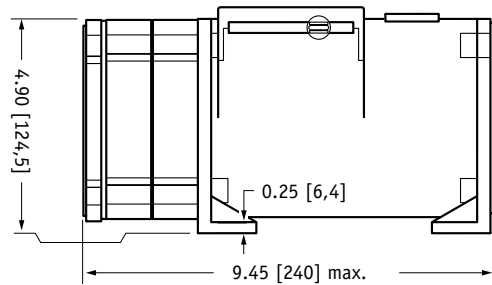

DIMENSIONS ARE IN INCHES (MM)  
tolerances are 0.03 IN. (0.5 MM) unless otherwise noted.

\* tolerance = +.005 -.001 [+.13 -.03]  
\*\* tolerance = +.005 -.005 [+13 -.13]