

XPRO® • LOW COST PRESSURE TRANSMITTER

APPLICATIONS

- FREON® AND AMMONIA REFRIGERATION
- PROCESS CONTROL
- FLOW DETECTION
- PNEUMATIC SYSTEMS
- WATER RESOURCE MANAGEMENT
- LIQUID LEVEL MEASUREMENT

The XPRO® pressure transmitter provides both the instrument engineer and OEM designer with a reliable and affordable measurement. The 4-20 mA output signal is particularly suited for long cable runs in electrically noisy environments.

The XPRO's silicon strain gages are mounted on a beam coupled to a 300 series stainless steel diaphragm for maximum isolation from thermal transients. The pressure cavity is a brazed assembly of 300 series stainless steel with no elastomer seals or adhesive bonds to corrode or deteriorate.

The XPRO is recognized by Underwriters Laboratories as an intrinsically safe* device for use in hazardous locations.



*When used with approved barriers.

FEATURES

- Low cost
- 1% accuracy
- All stainless steel
- Sealed, rugged package

BENEFITS

- Savings for the OEM
- Useful for secondary process measurements
- Corrosion resistant
- Suited for industrial environments

INTERTECHNOLOGY 1 Scarsdale Road
1-800-465-1600 INC. Don Mills, Ontario
M3B 2R2
Tel: 416-445-5500, Fax: 416-445-1170
E-Mail: sales@intertechnology.ca

TECHNICAL SPECIFICATIONS

RANGE

0-15, 25, 50 PSIG 0-100, 200 PSIS	0-500, 1000, 3000, 5000
(0-1, 2, 3.5 bar g) (0-7, 14, bar s)	(0-35, 70, 207, 345 bar s)

(bar values are approximate)

PHYSICAL

Proof Pressure	2 x rated range	1.5 x rated range
Burst Pressure	20 x rated range	5 x rated range
Material in Contact With Media	Brazed assembly of 300 series stainless steel	
Shock	50 g's peak (5 milliseconds)	
Vibration	Meets MIL-STD 810-C, Figure 514.2-5, Curve AK, 20.7 g rms minimum	
Weight	Less than 3 oz (85 gm) without cable	

ELECTRICAL

Full Scale Output	16 ± 0.32 mA into 0-1400 loop resistance @ 25°C (4-20 mA)
Zero Output	4 ± 0.4 mA @ 25°C
Excitation**	12 to 40 Vdc* Linear derating to 35 Vdc from 25° to 100°C
Reverse Polarity Protection	Yes
Insulation Resistance	1000 M @ 250 Vdc
Electrical Connection	2-conductor cable, 22 AWG, color coded shielded cable, 3 ft (0.91m) long

PERFORMANCE

Accuracy	± 1% FSO from best fit straight line including effects of nonlinearity hysteresis and nonrepeatability
Operating Temperature Range	-18° to 100°C (0° to 212°F) Hirschmann -18° to 90°C (0° to 194°F)
Compensated Temperature Range	-1° to 54°C (30° to 130°F)
Thermal Effect on Zero	Less than ± 1% FSO within the compensated range
Thermal Effect on Full Scale Output	Less than ± 1% within the compensated range

OPTIONS


- Hirschmann connector, including mate
- Absolute pressure version available in 0-15, 25, 50, 100 and 200 PSIA




XPRO with Hirschmann Connector

DIMENSIONS

xx.xx = inches
(xx.x) = mm

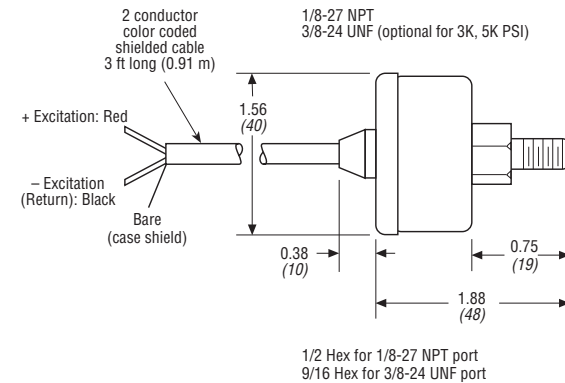

Load resistance in current loop

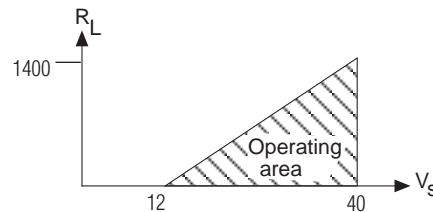

PIN AND WIRE CODES

Wire Color Code	Hirschmann Pin Code	Function
Red	4	+ Excitation
Black	3	- Excitation (Return)
Bare	NC	Case Shield

* 29.5 V max when used with energy barrier strip

* The minimum rated excitation voltage must be maintained at the transmitter. Therefore you must take into account voltage losses due to cable resistance when selecting a power supply.