

# SHEAR WEB LOAD CELLS

## SHEAR WEB (SW) SERIES FORCE TRANSDUCERS

### FEATURES

- First Choice for Structural and Materials Testing
- Low Height
- Guaranteed Maximum Off-Center Load and Moment Error
- Low Creep
- Low Susceptibility to Magnetic Fields
- Barometric Pressure Compensation
- Temperature Compensated
- Output to 4 mV/V
- Bayonet Connector




### SPECIFICATIONS

PARAMETERS	MODEL				
	SW10 300, 500, 1K, 2K	SW10 5K, 10K	SW20 25K, 50K	SW30 100K	SW40 200K
<b>Accuracy</b>					
Static Error Band, % R.O.	+/-0.04	+/- 0.05	+/- 0.05	+/- 0.05	+/- 0.07
Non linearity, % R.O..	+/-0.04	+/- 0.05	+/- 0.05	+/- 0.05	+/- 0.07
Hysteresis, % R.O.	+/-0.03	+/-0.05	+/-0.05	+/-0.05	+/-0.07
Non-Repeatability, % R.O.	+/- 0.01	+/- 0.01	+/- 0.01	+/- 0.01	+/- 0.01
Creep, % Reading in 20 Minutes	+/- 0.03	+/- 0.03	+/- 0.03	+/- 0.03	+/- 0.03
Off-Center Load Sensitivity, % /inch	+/- 0.25	+/- 0.25	+/- 0.25	+/- 0.25	+/- 0.25
Side Load Sensitivity, %	+/- 0.25	+/- 0.25	+/- 0.25	+/- 0.25	+/- 0.25
Zero Balance, % R.O.	+/- 1.0	+/- 1.0	+/- 1.0	+/- 1.0	+/- 1.0
<b>Temperature</b>					
Range, Compensated, °F	+15 to +115	+15 to +115	+15 to +115	+15 to +115	+15 to +115
Range, Operating, °F	-65 to +200	-65 to +200	-65 to +200	-65 to +200	-65 to +200
Effect on Sensitivity, % Rdg/100 °F	0.08	0.08	0.08	0.08	0.08
Effect on Zero, %R.O./100 °F	0.15	0.15	0.15	0.15	0.15
<b>Electrical</b>					
Excitation Voltage, Recommended, Vdc	10	10	10	10	10
Input resistance, Ohms	350 +40/-3.5	350 +40/-3.5	350 +40/-3.5	350 +40/-3.5	350 +40/-3.5
Output Resistance, Ohms	350 +/- 3.5	350 +/- 3.5	350 +/- 3.5	350 +/- 3.5	350 +/- 3.5
Sensitivity (Rated Output), mV/V, Nominal	2	4	4	4	4
Insulation Resist., Bridge/Case, Meg Ohm	5000 @ 50 VDC	5000 @ 50 VDC	5000 @ 50 VDC	5000 @ 50 VDC	5000 @ 50 VDC
<b>Mechanical</b>					
Safe Overload Range, % R.O.	150	150	150	150	150
Weight (lbs.)	1.0	2.9	9.1	23.5	59
Weight w/Base (lbs.)	2.5	6.5	21.5	52.5	139
Flexure Material	Aluminum	Steel	Steel	Steel	Steel

# SHEAR WEB LOAD CELLS

## DIMENSIONS

Review Drawing	MODEL					
	SW10	SW10	SW20	SW30	SW40	
	300, 500, 1K, 2K	5K, 10K	25K, 50K	100K	200K	
	<b>CAPACITY (lbf)</b>					
1-CELL & BASE DIAMETER	(in inches) 4.12	4.12	6.06	8.00	10.90	
2-CELL HEIGHT TO HUB	1.38	1.38	1.75	2.50	3.50	
3-CELL BODY HEIGHT	1.25	1.25	1.63	2.25	3.00	
4-HUB DIAMETER	1.29	1.29	2.34 25K/2.58 50K	3.76	4.81	
5-MOUNTING B.C. DIAMETER	3.50	3.50	5.13	6.50	9.00	
6-SYMMETRIC B.C. OFFSET	22.5 Degrees	22.5 Degrees	15 Degrees	11.25 Degrees	11.25	
7-MTG. HOLE DIAMETER	0.28	0.28	0.41	0.53	.78	
8-HUB THREAD	1/2 - 20. 1.12 Dp.	5/8 - 18. 1.12 Dp.	1 1/4 - 12. 1.50 Dp.	1 3/4 - 12. 2.20 Dp.	2 3/4 - 8. 3.2 Dp.	
9-BOLT HEAD PROTRUSION	0.20	0.20	0.30	0.4	.60	
10-BASE THICKNESS, TOTAL	1.13	1.13	1.75	2.00	3.00	
11-BASE STEP HEIGHT	0.03	0.03	0.03	0.03	.03	
12-BASE STEP DIAMETER	1.25	1.25	2.25	3.00	4.83	
13-BASE THREAD	1/2 -20. .88 Dp	5/8 -18. .88 Dp	1 1/4 - 12. 1.50 Dp.	1 3/4 - 12. 1.75 Dp.	2 3/4 - 8. 2.7 Dp.	

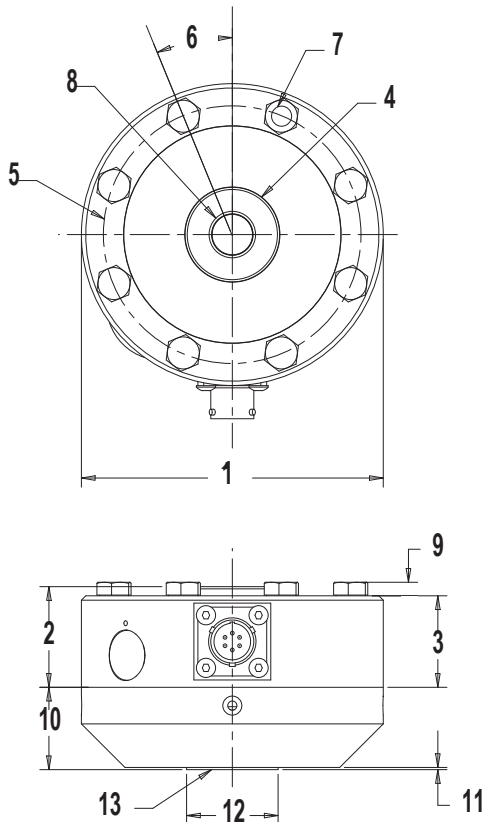

### OPTIONS

- Additional bridges
- Output adjustment to standard
- Compression overload protection
- Integral cable
- Custom connectors

### ACCESSORIES

- Mating connector
- Loading fixtures
- Interconnect cable
- Shunt calibration resistor
- Instrumentation

INTERTECHNOLOGY

1-800-465-1600 INC.

1 Scarsdale Road, Don Mills, ON M3B 2R2  
 Tel: 416-445-5500, Fax: 416-445-1170  
 E-Mail: [sales@intertechnology.ca](mailto:sales@intertechnology.ca)