




LST NETWORKS SERIES 'C' AND 'D'

- These instructions apply to all LST networks with either 'C' or 'D' suffix.
- These networks contain certain design modifications to increase overall network accuracy.
- Please note that lead #6 is used only during manufacturing for calibration and is shorter than the other leads.

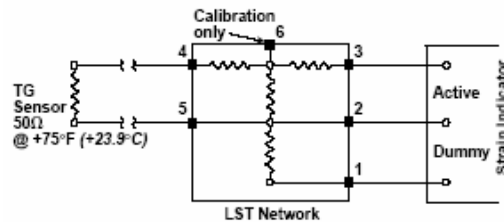

- During use of the LST, lead #6 must be free of electrical connections.
- The balance point (zero output) for these networks is 0° F for Fahrenheit networks and 0° C for Celsius networks.
- For more information see Vishay Micro-Measurements Tech Note TN-506, "Bondable Resistance Temperature Sensors and Associated Circuitry".

LST NETWORKS SERIES 'C' AND 'D'